


Amphenol®

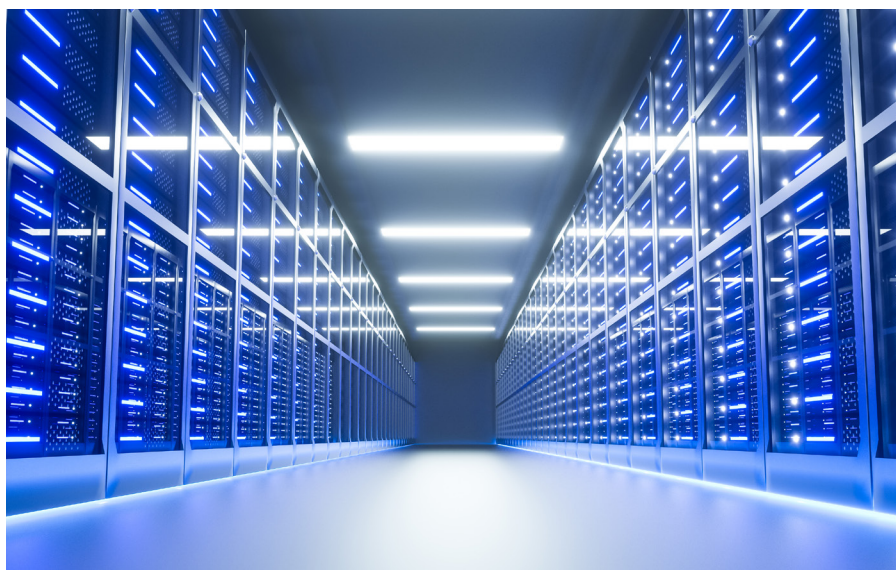

LPT Series Connectors

Proven MIL-C-26482 Heritage

www.amphenol-industrial.com

Table of Contents

Company Introduction.....2

Product Introduction3

Market Applications4

Technical Data.....5

How to Order/Shell Type.....6

Crimp Contact Ordering Information7

Service Class9

Alternate Positioning10

Insert Arrangements11

Product Dimensions13

Company Introduction



Amphenol Industrial Operations

Amphenol Industrial Operations (AIO), a division of Amphenol Corporation, is a prominent manufacturer of cylindrical connectors designed for a wide range of harsh environment applications throughout the world.

Headquartered in a 30,000 square foot facility in Endicott, N.Y., Amphenol Industrial provides a full range of high reliability power/signal connectors and interconnection systems specifically for the industrial markets including rail/mass transit, process control, automotive manufacturing, heavy equipment, wireless base stations and petrochemical/power generation. Amphenol Industrial's product lines consist of rectangular, standard miniature, fiber optic, EMI/EMP filter, and a variety of special application connectors.

Manufacturing connectors since 1932, we take pride that Amphenol Industrial Operations is the undisputed leader in interconnect systems for harsh environment applications. Innovations like our RADSOK ® contact technology can provide roughly 50% more current through the same size pin. Connectors utilizing our RADSOK® technology outperform similar products throughout the market.



Amphenol Technology (Zhuhai) Co., LTD

Established in 2007, Amphenol Technology (Zhuhai) Co., Ltd. is a manufacturing facility for Amphenol Industrial Operations, which serves a number of industrial markets, included but not limited to Factory Automation, Transportation, Heavy Equipment, Alternative Energy, Oil & Gas, Server/Data Comm and Power Distribution.

Amphenol Technology (Zhuhai) Co., Ltd. covers an area of 306,449 square feet (28,470m²) and is equipped with CNCs, plating, injection molding and assembly workshops. This plant specializes in the design and manufacture of industrial connectors featuring high power, high density inserts, medium to high voltage electrical properties, and harsh environment applications.

Many of the products produced here have been certified by independent standards including UL, IEC/TUV, ATEX, IECEx and MA. The facility is also certified to ISO 9001, ISO 14001 and TS16949.

LPT Series Product Information



What are LPT Series Connectors?

The LPT Series is based on the MIL-C-26482 Series I and Amphenol's original PT Series. Cost effective without sacrificing quality. This series is a cylindrical bayonet connector constructed with an aluminum shell and features stamped and formed crimped contacts.

Features and Benefits

- Aluminum shell construction provides high strength while being light in weight
- Multiple shell plating options (up to 500H salt spray protection)
- Stamped and formed crimp contacts with a 3 time retention system
- Machined contacts available
- Off the shelf availability
- Quick positive bayonet coupling
- 5 key/keyway mating
- Ingress protection up to IP67 and IP69K when in the mated condition
- High shock and high vibration resistance
- Operating temperature range: -40°C to 125°C
- Intermateable with Amphenol's PT series
- PT standard shells have years of proven performance in the field
- UL/TUV Certified

Structure Features

- 1) Box mounting receptacle
- 2) Jam nut receptacle
- 3) Straight plug
- 4) Wall mounting receptacle
- 5) Cable connecting receptacle

3 Connector Finishes Available:

- 1) Black zinc (RoHS)
- 2) Nickel (RoHS)
- 3) Gray zinc nickel (RoHS)

4 Alternate Positioning: Insert rotation W, X, Y, Z

Crimp Contact Size:

- 1) #12: 14-12 (2.00-3.50mm²)
- 2) #16: 18-16 (0.75-1.50mm²)
- 3) #20: 22-20 (0.34-0.50mm²)

4) Contact our sales team if you need RADSOK® or alternate size contact options

Market Applications

Widely used in general and harsh environments, the LPT Series is suitable for markets including but not limited to the following:


- Industrial Instrumentation
- Security
- Telecommunications
- Robotics/Factory Automation
- Process Control
- Energy Storage
- Hybrid/Electric Vehicle
- Heavy Equipment
- Rail Mass Transit



Technical Data

Shell Material	Aluminum	
Insert Material	Plastic	
Contact	Material	Copper Alloy
	Plating	Tin/Nickel/Gold Plated
	Termination	Crimp
Temperature Range	-40 °C to +125 °C	
Ingress Protection	IP67&IP69K in the mated condition Ingress Protection A basic dust cover or an IP67 compliant cap are available for protection in the unmated condition	
Test Current	20# contact 5A	
	16# contact 13A	
	12# contact 23A/35A with RADSOK®	
Recommended Operating Voltage	I # 250V	
	II # 500V	
Test Voltage AC	I # 1500V	
	II # 2300V	
Mating Cycles	500 Cycles	
Salt Spray Test	1. Black Zinc (non-conductive): 48H Salt Spray Test 2. Nickel (conductive): 48H 3. Gray Zinc Nickel (conductive): 500H	
Vibration	In accordance with test procedure EIA-364-28	
Thermal Shock	In accordance with test procedure EIA-364-32	
RoHS	Compliant	

How To Order

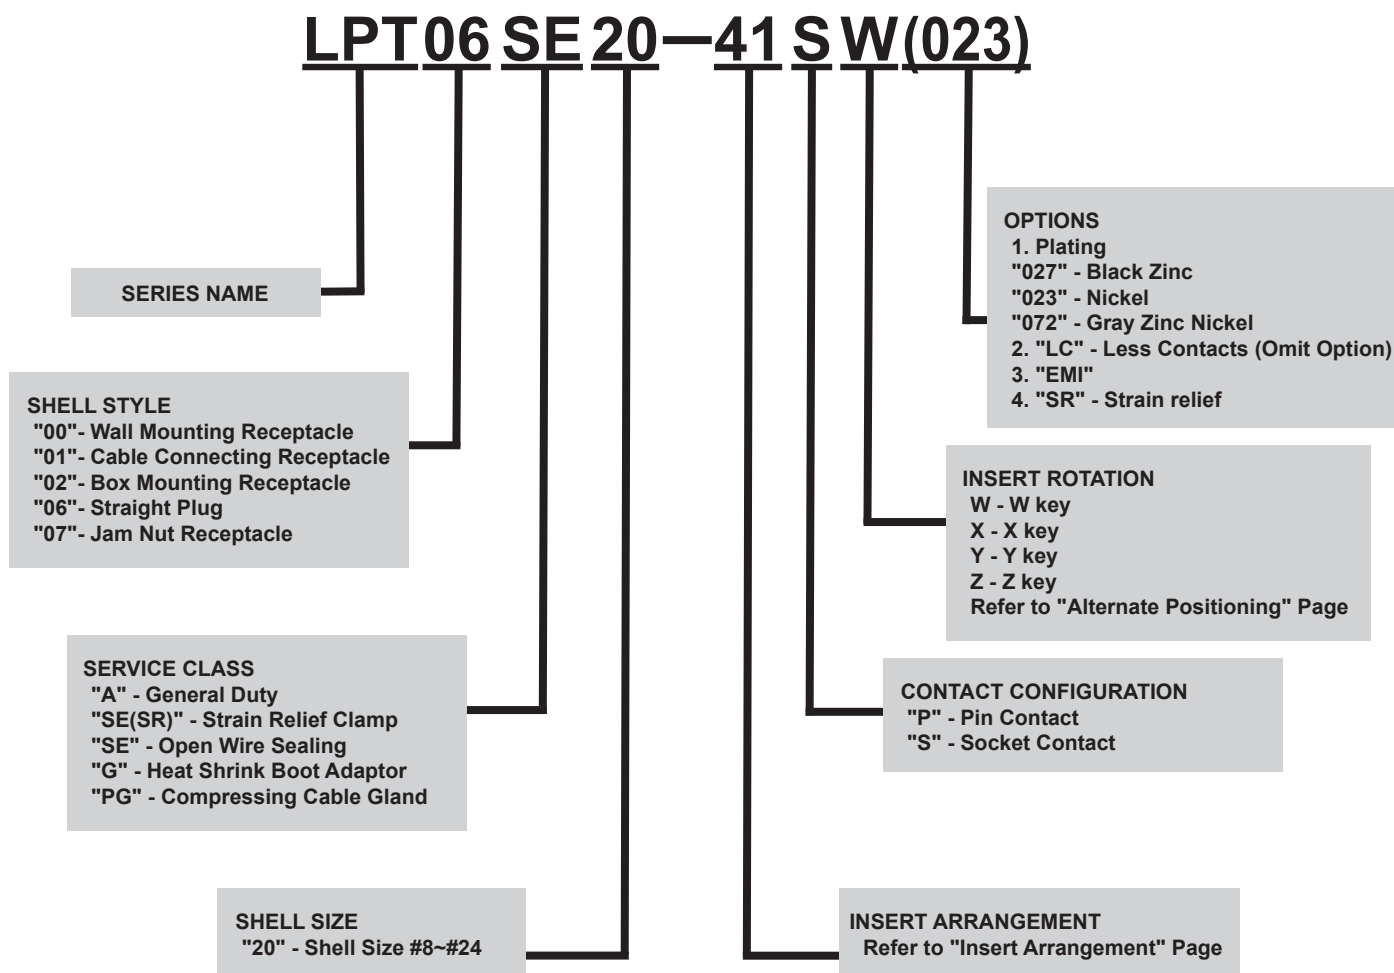

Note: Contacts must be ordered separately, see pages 7 through 8

Shell Type

Wall Mounting
Receptacle
LPT00



Cable Connecting
Receptacle
LP101



Box Mounting
Receptacle
LPT02





Wall Mounting
Receptacle
LPT06



Jam Nut
Receptacle
LPT07



Crimp Contact Ordering Information



Size	Current	PIN/SOCKET	Wire		PLATING	PART NO.	PCS/REEL
	(A)		AWG	mm ²			
#20	5	PIN	22-20	0.34-0.50	Tin Plating	LPTC-SF-20P-20-1	3000
					Ni Plating	LPTC-SF-20P-20-2	
					Gold Flash	LPTC-SF-20P-20-3	
					10u" gold plating	LPTC-SF-20P-20-4	
					30u" gold plating	LPTC-SF-20P-20-5	
		SOCKET	22-20	0.34-0.50	Tin Plating	LPTC-SF-20S-20-1	
					Ni Plating	LPTC-SF-20S-20-2	
					Gold Flash	LPTC-SF-20S-20-3	
					10u" gold plating	LPTC-SF-20S-20-4	
					30u" gold plating	LPTC-SF-20S-20-5	
#16	13	PIN	16-18	0.75-1.50	Tin Plating	UPTC-SF-16P-16-1	3000
					Ni Plating	UPTC-SF-16P-16-2	
					Gold Flash	UPTC-SF-16P-16-3	
					10u" gold plating	UPTC-SF-16P-16-4	
					30u" gold plating	UPTC-SF-16P-16-5	
			20-22	0.34-0.50	Tin Plating	UPTC-SF-16S-16-1	
					Ni Plating	UPTC-SF-16S-16-2	
					Gold Flash	UPTC-SF-16S-16-3	
					10u" gold plating	UPTC-SF-16S-16-4	
					30u" gold plating	UPTC-SF-16S-16-5	
		SOCKET	16-18	0.75-1.50	Tin Plating	UPTC-SF-16S-16-1	
					Ni Plating	UPTC-SF-16S-16-2	
					Gold Flash	UPTC-SF-16S-16-3	
					10u" gold plating	UPTC-SF-16S-16-4	
					30u" gold plating	UPTC-SF-16S-16-5	
			20-22	0.34-0.50	Tin Plating	UPTC-SF-16S-20-1	
					Ni Plating	UPTC-SF-16S-20-2	
					Gold Flash	UPTC-SF-16S-20-3	
#12	23	PIN	12~14	2.00-3.50	10u" gold plating	UPTC-SF-16S-20-4	
					30u" gold plating	UPTC-SF-16S-20-5	
					Tin Plating	LPTC-SF-12P-12-1	1000
					Ni Plating	LPTC-SF-12P-12-2	
					Gold Flash	LPTC-SF-12P-12-3	
					10u" gold plating	LPTC-SF-12P-12-4	
					30u" gold plating	LPTC-SF-12P-12-5	
		SOCKET	12~14	2.00-3.50	Tin Plating	LPTC-SF-12S-12-1	
					Ni Plating	LPTC-SF-12S-12-2	
					Gold Flash	LPTC-SF-12S-12-3	
					10u" gold plating	LPTC-SF-12S-12-4	
					30u" gold plating	LPTC-SF-12S-12-5	

Machined Contact Ordering Information



Size	Current	PIN/SOCKET	Wire		PLATING	PART NO.
	(A)		AWG	mm ²		
#20	5	PIN	22-20	0.34-0.50	Tin Plating	LPTC-MA-20P-20-1
					Ni Plating	LPTC-MA-20P-20-2
					Gold Flash	LPTC-MA-20P-20-3
					10u" gold plating	LPTC-MA-20P-20-4
					30u" gold plating	LPTC-MA-20P-20-5
		SOCKET	22-20	0.34-0.50	Tin Plating	UPTC-MA-16P-16-1
					Ni Plating	UPTC-MA-16P-16-2
					Gold Flash	UPTC-MA-16P-16-3
					10u" gold plating	UPTC-MA-16P-16-4
					30u" gold plating	UPTC-MA-16P-16-5
#16	13	PIN	16-18	0.75-1.50	Tin Plating	UPTC-MA-16P-20-1
					Ni Plating	UPTC-MA-16P-20-2
					Gold Flash	UPTC-MA-16P-20-3
					10u" gold plating	UPTC-MA-16P-20-4
					30u" gold plating	UPTC-MA-16P-20-5
			20-22	0.34-0.50	Tin Plating	UPTC-MA-16S-16-1
					Ni Plating	UPTC-MA-16S-16-2
					Gold Flash	UPTC-MA-16S-16-3
					10u" gold plating	UPTC-MA-16S-16-4
					30u" gold plating	UPTC-MA-16S-16-5
		SOCKET	16-18	0.75-1.50	Tin Plating	UPTC-MA-16S-20-1
					Ni Plating	UPTC-MA-16S-20-2
					Gold Flash	UPTC-MA-16S-20-3
					10u" gold plating	UPTC-MA-16S-20-4
					30u" gold plating	UPTC-MA-16S-20-5
			20-22	0.34-0.50	Tin Plating	UPTC-MA-16S-20-1
					Ni Plating	UPTC-MA-16S-20-2
					Gold Flash	UPTC-MA-16S-20-3
					10u" gold plating	UPTC-MA-16S-20-4
					30u" gold plating	UPTC-MA-16S-20-5
#12	23	PIN	12~14	2.00-3.50	Tin Plating	LPTC-MA-12P-12-1
					Ni Plating	LPTC-MA-12P-12-2
					Gold Flash	LPTC-MA-12P-12-3
					10u" gold plating	LPTC-MA-12P-12-4
					30u" gold plating	LPTC-MA-12P-12-5
		SOCKET	12~14	2.00-3.50	Tin Plating	LPTC-MA-12S-12-1
					Ni Plating	LPTC-MA-12S-12-2
					Gold Flash	LPTC-MA-12S-12-3
					10u" gold plating	LPTC-MA-12S-12-4
					30u" gold plating	LPTC-MA-12S-12-5

Service Classes


The LPT connector is available in the following certified service classes:



"A"



"SE"



"PG"



"SE(SR)"




"G"

"A"	General duty: back shell is threaded for conduit attachment of MS3057 cable clamp.
"SE(SR)"	Strain relief clamp - environmental resistant strain relief clamp and grommet for moisture proofing individual wires; provides added wire bundle support.
"SE"	Open wire sealing environmental resistant, with a nut and grommet for moisture proofing individual wires.
"G"	Heat shrink boot adaptor- back shell for heat shrink boot, with optional grommet for moisture proofing individual wires.
"PG"	Compressing cable gland for moisture proofing jacketed cables with option of EMI shielding function.


Alternate Positioning

To avoid cross-mating problems in applications requiring the use of more than one miniature cylindrical connector of the same size and arrangement, alternate insert rotations are available as indicated in the accompanying chart.


As shown in the diagram at the right, the front face of the pin insert is rotated within the shell in a clockwise direction from the normal shell key. The socket insert would be rotated counterclockwise the same number of degrees in respect to the normal shell key.




Position W



Position X



Position Y



Position Z

Insert Rotation					
Shell Size	Insert Arrangement	Degrees			
		W	X	Y	Z
8	8-4	45	97	184	-
10	10-2	45	90	315	
10	10-6	90	-	-	-
12	12-4	38	-	-	-
12	12-8	90	112	203	292
12	12-10	60	155	270	295
14	14-5	40	92	184	273
14	14-8	48	162	189	312
14	14-19	30	165	315	
14	14-AA	45	-	-	-

Insert Rotation					
Shell Size	Insert Arrangement	Degrees			
		W	X	Y	Z
16	16-8	54	152	180	331
16	16-26	60	-	275	338
18	18-5	55	97	263	315
18	18-8	180	-	-	-
18	18-11	62	119	241	340
18	18-32	85	138	222	265
20	20-16	238	318	333	347
20	20-41	45	126	225	-
22	22-55	30	142	226	314
24	24-31	90	225	255	-






Insert Arrangements








Pole	4	2	6	4	4
Insert Arrangement					
	8-4	10-2	10-6	10-IV	12-4
Service Rating	I	I	I	I	I
Total Contacts	4	2	6	4	4
Contact No.	20	16	20	16	16

Pole	8	10	4	8	5	8
Insert Arrangement						
	12-8	12-10	12-II	12-IIX	14-5	14-8
Service Rating	I	I	II	I	II	I
Total Contacts	8	10	2 2	8	5	6 2
Contact No.	20	20	20 12	16	16	20 12

Pole	19	4	12	4	8	26	19
Insert Arrangement							
	14-19	14-AA	14-XII	14-IV (600V)	16-8	16-26	16-XIX
Service Rating	I	I	I	NA	II	I	I
Total Contacts	19	4	12	4	8	26	19
Contact No.	20	12	16	12	16	20	16


Insert Arrangements (continued)

Pole	5	8	11	32	23
Insert Arrangement					
	18-5	18-8	18-11	18-32	18-XX3
Service Rating	II	I	II	I	I
Total Contacts	5	8	11	32	23
Contact No.	12	12	16	20	16

Pole	16	41	55	35	38	31	48
Insert Arrangement							
	20-16	20-41	22-55	22-3X5	22-3X8	24-31	24-4X8
Service Rating	II	I	I	I	I	I	I
Total Contacts	16	41	55	35	38	31	48
Contact No.	16	20	20	16	16	16	16

Product Dimensions

LPT00 (Wall Mounting Receptacle & Backshells)

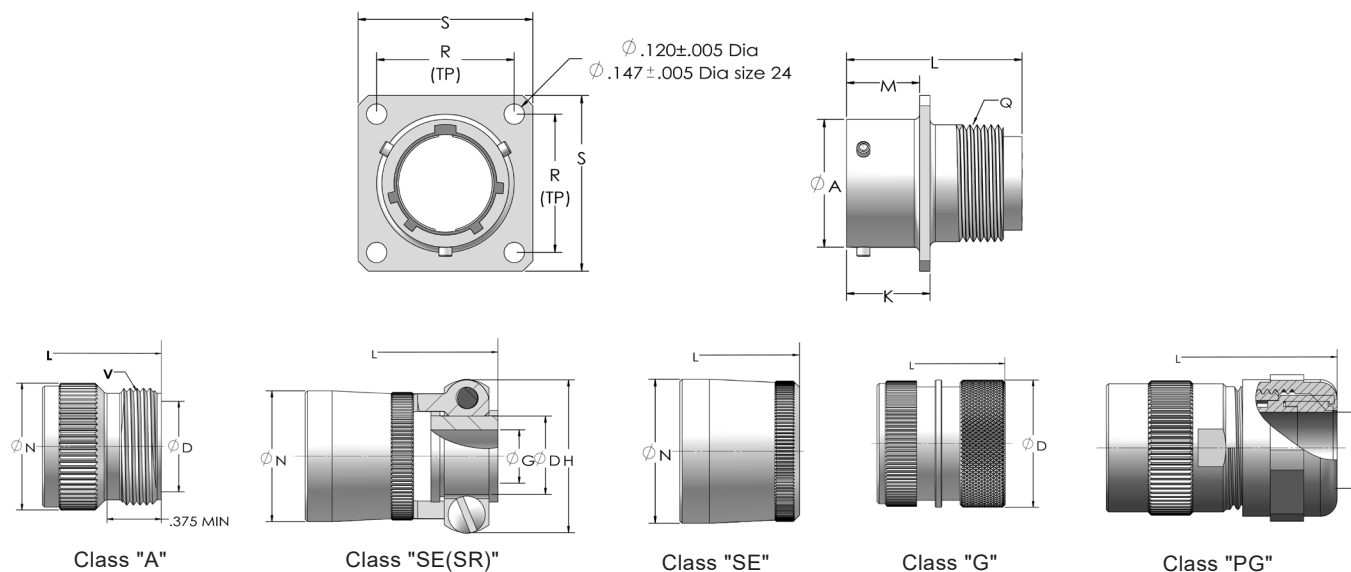


Shell Size	Receptacle Front View		Receptacle Side View						CLASS "A"				CLASS "SE(SR)"	
	R	S	A	M	K	L		Q	D	L	N	V	D	G
			+.001 -.005	+.010 -.000	+.020 -.010	Max.		Thread Class 2A	Min.	Max.	Max.	Thread Class A	Min.	Max.
						PIN	SOCKET							
8	.594	.812	.473	.431	.493	1.270	1.056	.5625-24NEF	.297	1.633	.590	.5000-28UNEF	.240	.125
10	.719	.938	.590	.431	.493	1.270	1.056	.4375-28UNEF	.421	1.633	.717	.6250-24NEF	.302	.188
12	.812	1.031	.750	.431	.493	.127	1.056	.6875-24NEF	.546	1.633	.834	.7500-20UNEF	.428	.312
14	.906	1.125	.875	.431	.493	.127	1.056	.8125-20UNEF	.663	1.633	.970	.8750-20UNEF	.552	.375
16	.969	1.219	1.000	.431	.493	1.270	1.056	.9375-20UNEF	.787	1.633	1.088	1.0000-20UNEF	.615	.500
18	1.062	1.312	1.125	.431	.493	1.270	1.056	1.0625-18NEF	.879	1.633	1.216	1.1875-18NEF	.740	.625
20	1.156	1.438	1.250	.556	.650	1.332	1.164	1.1875-18NEF	1.014	1.674	1.332	1.1875-18NEF	.740	.625
22	1.250	1.562	1.375	.556	.650	1.332	1.164	1.3125-18NEF	1.134	1.674	1.460	1.4375-18NEF	.928	.750
24	1.375	1.688	1.500	.589	.683	1.332	1.164	1.4375-1 BNEF	1.259	1.674	1.585	1.4375-18NEF	.990	.800

Shell Size	CLASS "SE(SR)"				CLASS "SE"			CLASS "G"		CLASS "PG"		
	H	L		N	L		N	L	N	N	D	L
	Max.	Max.		Max.	Max.		Max.	Max.	Max.	REF	Cable Range (mm)	REF
		PIN	SOCKET		PIN	SOCKET						
8	.812	2.354	2.202	.550	1.746	1.538	.560	1.768	.620	.571	3-6.5	2.309
10	.875	2.354	2.202	.675	1.746	1.538	.685	1.768	.730	.814	4-8	2.309
12	1.000	2.354	2.202	.803	1.746	1.538	.813	1.768	.939	.814	4-8	2.309
14	1.125	2.354	2.202	.920	1.746	1.538	.930	1.768	.971	.930	5-10	2.309
16	1.188	2.486	2.272	1.047	1.746	1.538	1.057	1.768	1.179	1.120	10-14	2.309
18	1.438	2.486	2.272	1.165	1.746	1.750	1.175	1.768	1.266	1.180	13-18	2.309
20	1.438	2.684	2.470	1.290	1.918	1.750	1.301	1.980	1.427	1.296	13-18	2.385
22	1.625	2.684	2.470	1.418	1.918	1.750	1.430	1.980	1.522	1.496	18-25	2.385
24	1.719	2.684	2.470	1.543	1.918	1.750	1.555	1.980	1.644	1.562	18-25	2.385

Product Dimensions

LPT01 (Cable Connecting Receptacle & Back Shells)


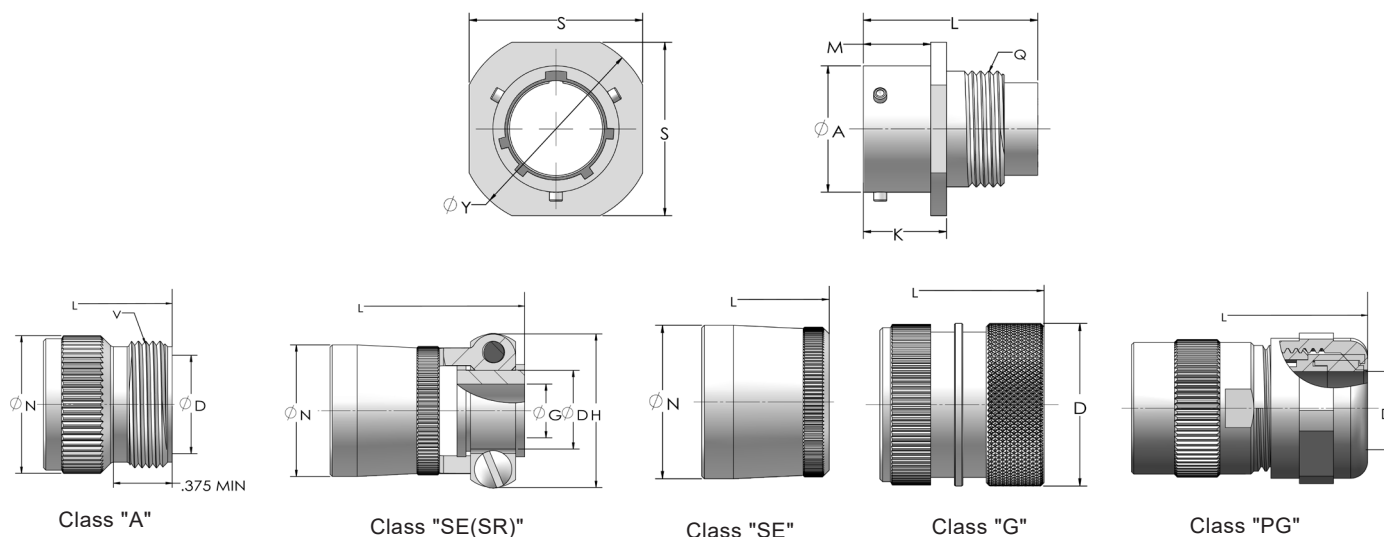


Shell Size	Receptacle Front View		Receptacle Side View						CLASS "A"				CLASS "SE(SR)"	
	S	Y	A	M	K	L		Q	D	L	N	V	D	G
	±.020	±.020	+.001 -.005	+.010 -.000	+.020 -.010	Max.		Thread Class 2A	Min.	Max.	Max.	Thread Class A	Min.	Max.
						PIN	SOCKET							
8	.812	.938	.473	.400	.494	1.270	1.056	.4375-28UNEF	.297	1.633	.590	.5000-28UNEF	.240	.125
10	.938	1.062	.590	.400	.494	1.270	1.056	.5625-24NEF	.421	1.633	.717	.6250-24NEF	.302	.188
12	1.031	1.156	.750	.400	.494	.127	1.056	.6875-24NEF	.546	1.633	.834	.7500-20UNEF	.428	.312
14	1.125	1.250	.875	.400	.494	.127	1.056	.8125-20UNEF	.663	1.633	.970	.8750-20UNEF	.552	.375
16	1.219	1.344	1.000	.400	.494	1.270	1.056	.9375-20UNEF	.787	1.633	1.088	1.0000-20UNEF	.615	.500
18	1.312	1.438	1.125	.400	.494	1.270	1.056	1.0625-18NEF	.879	1.633	1.216	1.1875-18NEF	.740	.625
20	1.438	1.562	1.250	.535	.650	1.332	1.164	1.1875-18NEF	1.014	1.674	1.332	1.1875-18NEF	.740	.625
22	1.562	1.688	1.375	.535	.650	1.332	1.164	1.3125-18NEF	1.134	1.674	1.460	1.4375-18NEF	.928	.750
24	1.688	1.812	1.500	.568	.683	1.332	1.164	1.4375-1 BNEF	1.259	1.674	1.585	1.4375-18NEF	.990	.800

Shell Size	CLASS "SE(SR)"				CLASS "SE"			CLASS "G"		CLASS "PG"		
	H	L		N	L		N	L	N	N	D	L
	Max.	Max.		Max.	Max.		Max.	Max.	Max.	REF	Cable Range (mm)	REF
		PIN	SOCKET		PIN	SOCKET						
8	.812	2.354	2.202	.550	1.746	1.538	.560	1.768	.620	.571	3-6.5	2.309
10	.875	2.354	2.202	.675	1.746	1.538	.685	1.768	.730	.814	4-8	2.309
12	1.000	2.354	2.202	.803	1.746	1.538	.813	1.768	.939	.814	4-8	2.309
14	1.125	2.354	2.202	.920	1.746	1.538	.930	1.768	.971	.930	5-10	2.309
16	1.188	2.486	2.272	1.047	1.746	1.538	1.057	1.768	1.179	1.120	10-14	2.309
18	1.438	2.486	2.272	1.165	1.746	1.750	1.175	1.768	1.266	1.180	13-18	2.309
20	1.438	2.684	2.470	1.290	1.918	1.750	1.301	1.980	1.427	1.296	13-18	2.385
22	1.625	2.684	2.470	1.418	1.918	1.750	1.430	1.980	1.522	1.496	18-25	2.385
24	1.719	2.684	2.470	1.543	1.918	1.750	1.555	1.980	1.644	1.562	18-25	2.385

Product Dimensions


LPT02 (Box Mounting Receptacle)

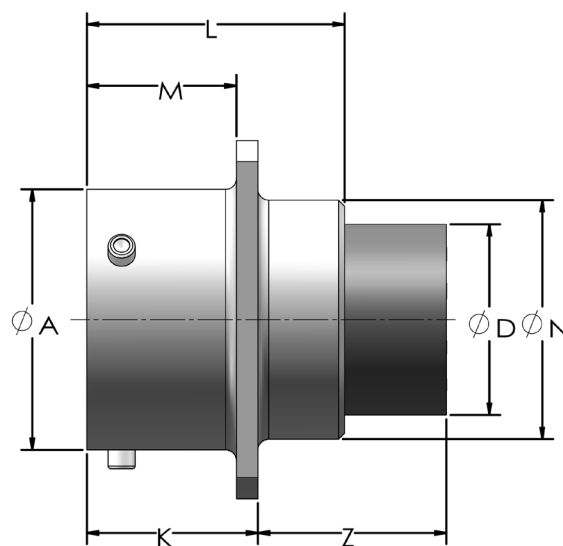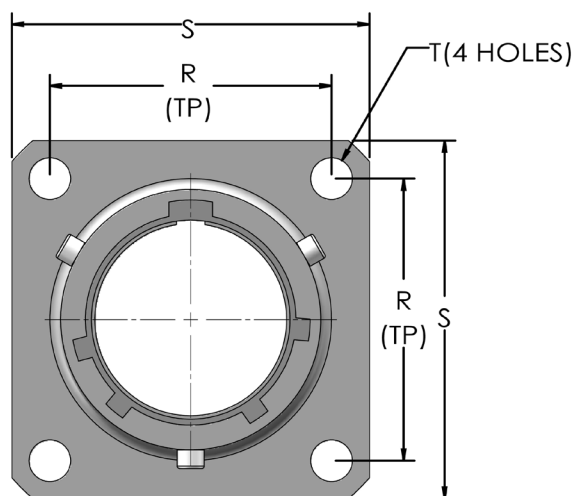

Shell Size	Receptacle Front View			Receptacle Side View							
	R	S	T	A	D	K	L	M	N	Z	
			±.005	+ .001 - .005	Max.	+ .020 - .010	Max.	+ .020 - .010	Dia. Max.	PIN	SOCKET
8	.594	.812	.120	.473	.326	.493	.825	.431	.449	.777	.563
10	.719	.938	.120	.590	.443	.493	.825	.431	.573	.777	.563
12	.812	1.031	.120	.750	.557	.493	.825	.431	.699	.777	.563
14	.906	1.125	.120	.875	.682	.493	.825	.431	.823	.777	.563
16	.969	1.219	.120	1.000	.807	.493	.825	.431	.949	.777	.563
18	1.062	1.312	.120	1.125	.908	.493	.825	.431	1.073	.777	.563
20	1.156	1.438	.120	1.250	1.033	.650	1.076	.556	1.199	.682	.514
22	1.250	1.562	.120	1.375	1.158	.650	1.076	.556	1.323	.682	.514
24	1.375	1.688	.147	1.500	1.283	.683	1.109	.589	1.449	.649	.481

Product Dimensions

LPT06 (Straight Plug & Backshells)


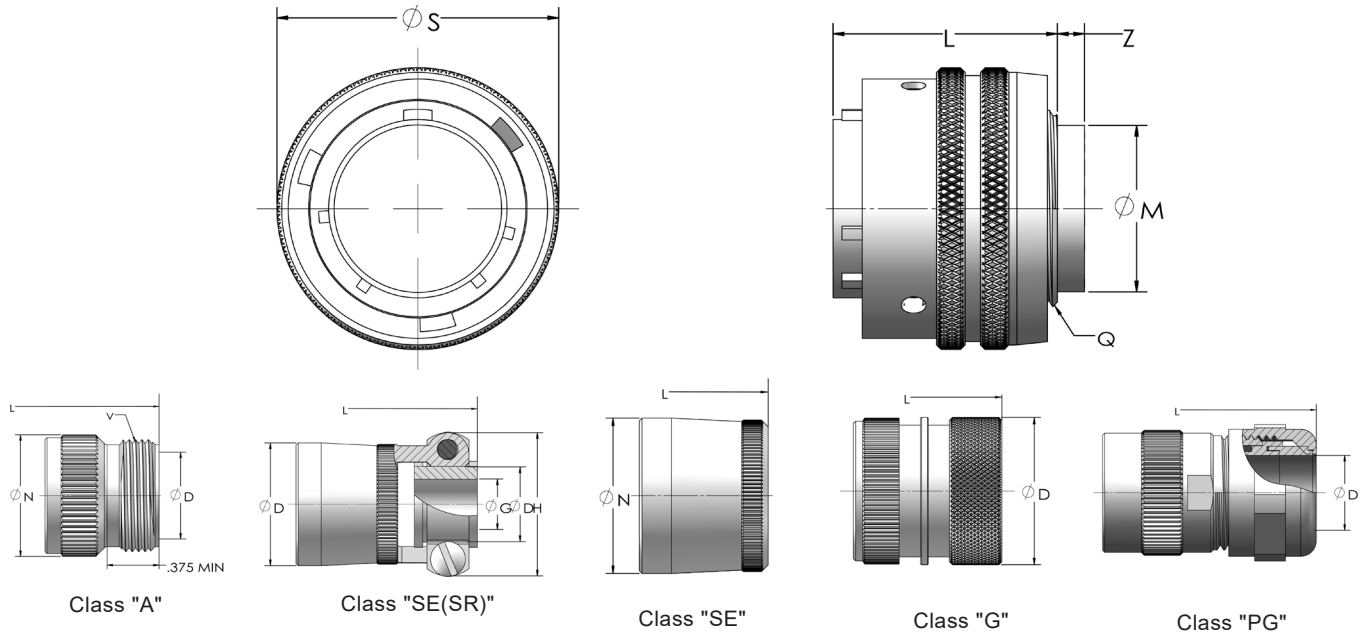


Shell Size	Plug Front View	Plug Side View						CLASS "A"				CLASS "SE(SR)"	
	S	L	M	Q	Z		D	L	N	V		D	G
	Max.	Max.	Max.	Thread	Max.		Min.	Max.	Max.	Thread		Min.	Max.
				Class 2A	PIN	SOCKET				Class A			
8	.750	.928	.326	.4375-28UNEF	.324	.110	.326	1.615	.590	.5000-28UNEF		.240	.125
10	.859	.928	.443	.5625-24NEF	.324	.110	.443	1.615	.717	.6250-24NEF		.302	.188
12	1.031	.928	.557	.6875-24NEF	.324	.110	.557	1.615	.834	.7500-20UNEF		.428	.312
14	1.156	.928	.682	.8125-20UNEF	.324	.110	.682	1.615	.970	.8750-20UNEF		.552	.375
16	1.281	.928	.807	.9375-20UNEF	.324	.110	.807	1.615	1.088	1.0000-20UNEF		.615	.500
18	1.391	.928	.908	1.0625-18BNEF	.324	.110	.908	1.615	1.216	1.1875-18NEF		.740	.625
20	1.531	1.000	1.033	1.1875-18BNEF	.248	.080	1.033	1.594	1.332	1.1875-18NEF		.740	.625
22	1.656	1.000	1.158	1.3125-18NEF	.248	.080	1.158	1.594	1.460	1.4375-18NEF		.928	.750
24	1.776	1.000	1.283	1.4375-18BNEF	.248	.080	1.283	1.594	1.587	1.4375-18NEF		.990	.800

Shell Size	CLASS "SE(SR)"				CLASS "SE"			CLASS "G"		CLASS "PG"		
	H	L		N	N	L		L	N	N	D	L
	Max.	Max.		Max.	Max.	Max.		Max.	Max.	REF	Cable Range (mm)	REF
		PIN	SOCKET			PIN	SOCKET					
8	.812	2.336	2.122	.550	.560	1.728	1.520	1.750	.620	.571	3-6.5	2.291
10	.875	2.336	2.122	.675	.685	1.728	1.520	1.750	.730	.814	4-8	2.291
12	1.000	2.336	2.122	.803	.813	1.728	1.520	1.750	.939	.814	4-8	2.291
14	1.125	2.336	2.122	.920	.930	1.728	1.520	1.750	.971	.930	5-10	2.291
16	1.188	2.468	2.254	1.047	1.057	1.728	1.520	1.750	1.179	1.120	10-14	2.291
18	1.438	2.468	2.254	1.165	1.175	1.728	1.520	1.750	1.266	1.180	13-18	2.291
20	1.438	2.604	2.390	1.290	1.301	1.838	1.670	1.900	1.427	1.296	13-18	2.305
22	1.625	2.604	2.390	1.418	1.430	1.838	1.670	1.900	1.522	1.496	18-25	2.305
24	1.719	2.604	2.390	1.543	1.555	1.838	1.670	1.900	1.644	1.562	18-25	2.305

Product Dimensions

LPT07 (Jam Nut Receptacle)

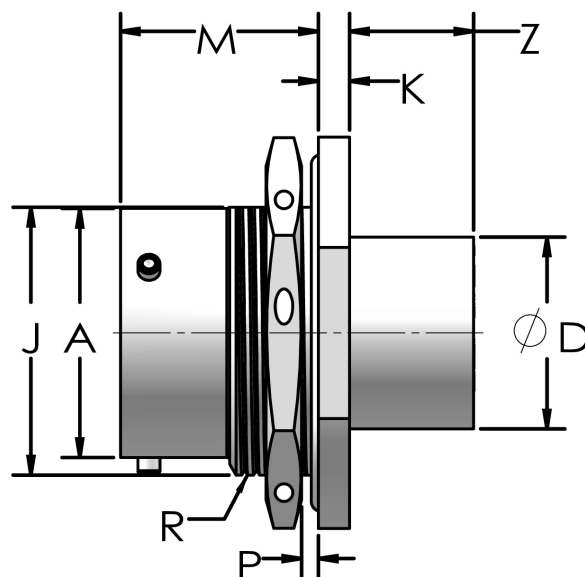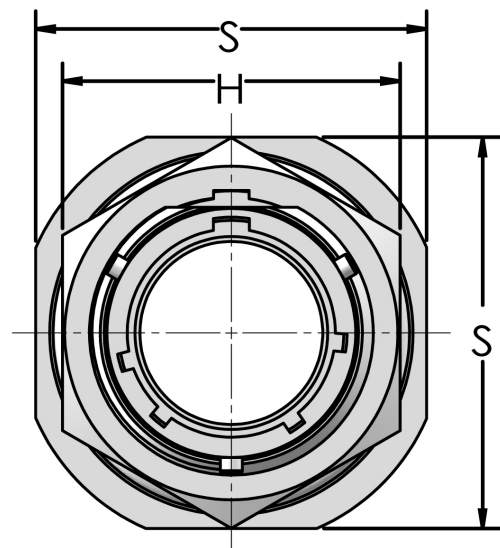

Shell Size	Receptacle Front View						Receptacle Side View					
	H ±.016	S	A	D	J Flat	K	M	P Panel Thickness		R Thread Class 2A UNEF	Z Max.	
			+ .001 - .005	Dia. Max.	+ .000 - .010	+ .020 - .010		Min.	Max.		PIN	SOCKET
8	.750	.938	.473	.326	.530	.125	.696	.062	.125	.5625-24	.450	.235
10	.875	1.062	.590	.443	.655	.125	.696	.062	.125	.6875-24	.450	.235
12	1.062	1.250	.750	.557	.818	.125	.696	.062	.125	.8750-20	.450	.235
14	1.188	1.375	.875	.682	.942	.125	.696	.062	.125	1.0000-20	.450	.235
16	1.312	1.500	1.000	.807	1.066	.125	.696	.062	.125	1.1250-18	.450	.235
18	1.438	1.625	1.125	.908	1.191	.125	.696	.062	.125	1.2500-18	.450	.235
20	1.562	1.812	1.250	1.033	1.316	.156	.884	.062	.250	1.3750-18	.292	.124
22	1.688	1.938	1.375	1.158	1.441	.156	.884	.062	.250	1.5000-18	.292	.124
24	1.816	2.062	1.500	1.283	1.566	.156	.917	.062	.250	1.6250-18	.260	.092



AMPHENOL CORPORATION
Amphenol Industrial Operations

Phone: 888-364-9011
20 Valley Street
Endicott, NY 13760-3600
www.amphenol-industrial.com

Amphenol Technology(Zhuhai) Co., Ltd.

No.63, Xinghan Road, Sanzao Town,
Jinwan, Zhuhai, 519040
China Tel: +86-756-398 9725
Fax: +86-756-398 9768
www.amphenol-industrial.com
Email: tech@amphenol-aio.com